

## Ambience Heavy Duty Multi-Link Roller Blind

### Product Information

**Ambience Heavy Duty Multi-Link** Roller Blind is perfect for operating multiple blinds for larger window spans with a single chain, eliminating unsightly cords. Resulting in better light control, greater privacy, uninterrupted views, and indoor/outdoor accessibility.

Suitable for both commercial and residential use.

Verosol's Ambience Heavy Duty Multi-Link Roller System can be easily upgraded from chain to motorised at any time.

### Further Information

To find out more information call Verosol Customer Care on 1800 721 404 or visit [www.verosol.com.au](http://www.verosol.com.au)



### Technical Information

Product Code	R202.3	
Product Name	Ambience Heavy Duty Multi-Link Roller Blind	
Operation	Stainless Steel Chain Operation	
Dimensions	Width	600mm minimum - 3000mm maximum
	Drop	600mm minimum - 3000mm maximum [Drop can be extended on request]
	Spring Assist	1200mm minimum width
	Maximum Area	24m <sup>2</sup> over 3 sections
Roller Tube	Standard	60mm is standard size for all Heavy Duty Roller Blinds
	Optional	80mm tube diameter is also available
Base Rail	Standard	Heavy Duty Base Rail [15mm x 42mm]
	Optional	D30 Silent* [13mm x 29mm], Verosol [17mm x 30mm] or Elliptical* [15mm x 26mm]
	Colours	Paint: White, Black and Sandstone      Anodised: Clear
Control	Mechanism	Direct action, high tensile wound steel spring which operated in such a way that it only applies the precise braking power necessary to keep the blind in the desired position.
	Idler	Bearing idler with fixed high tensile steel shaft
	Colours	Paint: White, Black
	Chain	PVC, Nickel Plated Steel or Stainless Steel
Brackets	Material	Press formed steel, pre-treated and powder coated
	Colours	White, Black

Turn over for motorisation and optional extras


# Ambience Heavy Duty Multi-Link Roller Blind

## Motorisation

Product Code	R202.7	
Product Name	Ambience Heavy Duty Multi-Link Roller Blind	
Operation	240V AC Motorised Motor Types: LT50 Hi-Pro   RTS50   RS485 Sonesse   RTS50 Sonesse   Automate FT	
Dimensions	Width	850mm minimum - 3000mm maximum
	Drop	600mm minimum - 3000mm maximum [Drop can be extended on request]
	Maximum Area	40m <sup>2</sup> over 4 sections
Roller Tube	Standard	60mm
	Optional	80mm tube diameter is also available

## System Diagrams


### Ambience Heavy Duty Multi-Link Roller Blind System

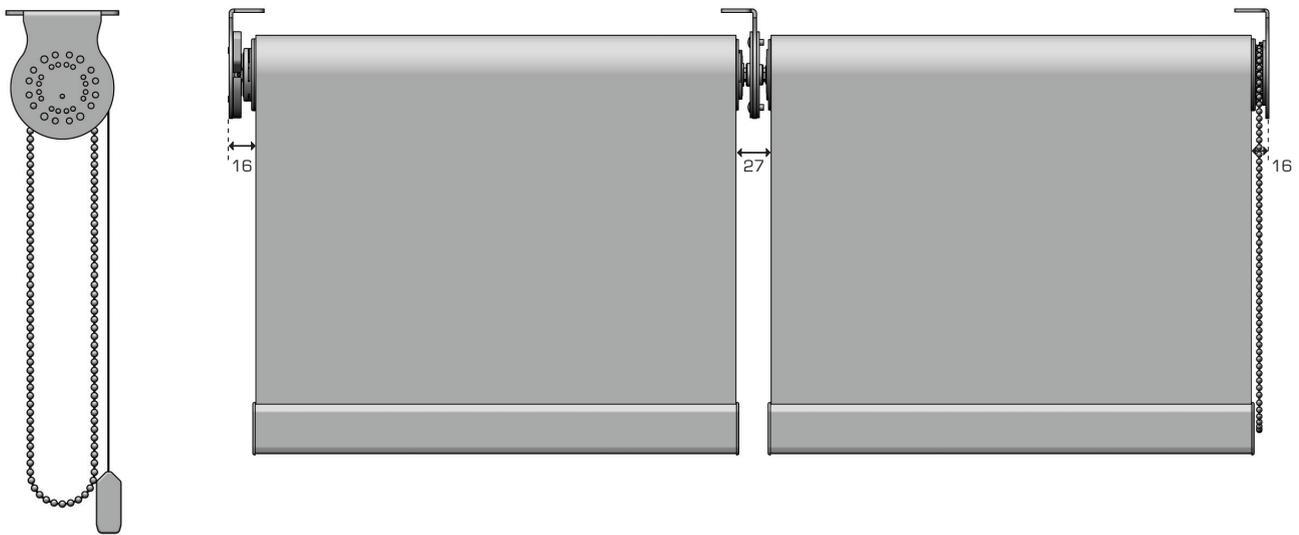


## Heavy Duty Brackets

Available in White and Black only

### Chain Drive Bracket

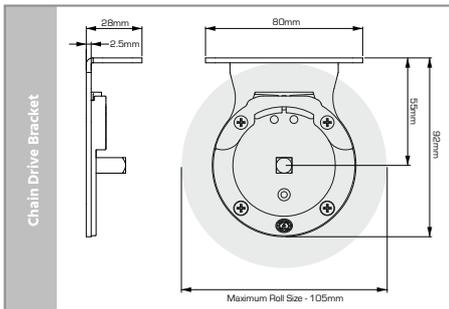

### Idle End Bracket

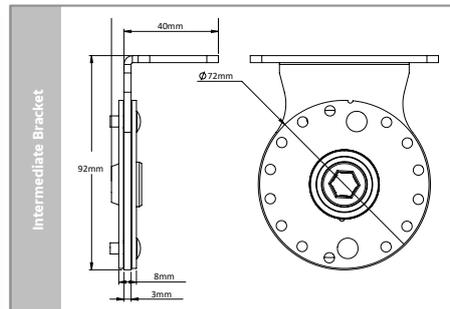

### Intermediate Bracket

