

Ambience Blackout PLUS Roller Blind

Product Information

Ambience Blackout PLUS Roller Blind offers a robust system ideal for use where ever increased privacy and light control is required, such as home theatres, conference rooms and bedrooms.

The Ambience Blackout PLUS Roller Blind is supplied complete with cassette style head box and blackout side channels.

Suitable for both commercial and residential use, Ambience Blackout PLUS Roller Blind is available in chain control or motorised operation.

Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit www.verosol.com.au



Technical Information

Product Code	R210.0	
Product Name	Ambience Blackout PLUS Roller Blind	
Operation	Stainless Steel Chain Operation	
Dimensions	Width	500mm minimum - 3000mm maximum
	Drop	500mm minimum - 3000mm maximum
	Spring Assist	850mm minimum width
	Maximum Area	6m ² without spring assist / 8m ² with spring assist
Roller Tube	Light	43mm - optimised for fabric weight and width of blind to reduce tube deflection
	Standard	44mm - optimised for fabric weight and width of blind to reduce tube deflection
	Heavy Duty	49mm - optimised for fabric weight and width of blind to reduce tube deflection
Base Rail	Standard	Heavy Duty Rail [15mm x 42mm]
	Colours	Paint: White or Black
Control	Mechanism	Direct action, high tensile steel spring which operated in such a way that it only applies the precise braking power necessary to keep the blind in the desired position.
	Idler	Extendable pin idle-end for easy installation. The idle-end extends up to 10mm in increments of 1mm for improved installation.
	Colours	Paint: White or Black
	Chain	PVC, Nickel Plated Steel or Stainless Steel
Brackets	Material	Press formed steel, pre-treated and powder coated
	Colours	White, or Black

Turn over for motorisation and optional extras

Ambience Blackout PLUS Roller Blind

Motorisation


Product Code	R210.6		R210.1
Product Name	Ambience Blackout PLUS Motorised Roller Blind		Ambience Wirefree Blackout PLUS Roller Blind
Operation	240V AC Motorised		15V 12V Wirefree
Dimensions	Width	600mm min - 3000mm max LS40 RTS40 LS40 Sonesse 700mm min - 3000mm max Automate ML Automate EL	Min Width: 2Nm: 740mm 3Nm: 950mm Max Width: 3000mm
	Drop	500mm min - 3000mm max	500mm min - 3000mm max
	Maximum Area	9m ²	2.0Nm: 8kg 3.0Nm: 12kg
Roller Tube	Light	43mm - optimised for fabric weight and width of blind to reduce tube deflection	
	Standard	44mm - optimised for fabric weight and width of blind to reduce tube deflection	
	Heavy Duty	49mm - optimised for fabric weight and width of blind to reduce tube deflection	

Side Guides & Headbox


Side Guides	Type	Two-piece guide inclusive mounting frame and snap in guide
	Material	Extruded Aluminium Alloy [T5 Temper]
	Dimensions	25mm D x 55mm W
	Fixing	Side Fix or Face Fix
Headbox	Type	Headbox Round or Square
	Material	Extruded Aluminium Alloy [T5 Temper]
	Dimensions*	92mm x 93mm
	Maximum	4800mm maximum width
	Colours	White or Black

System Diagrams

Ambience Blackout PLUS Roller Blind

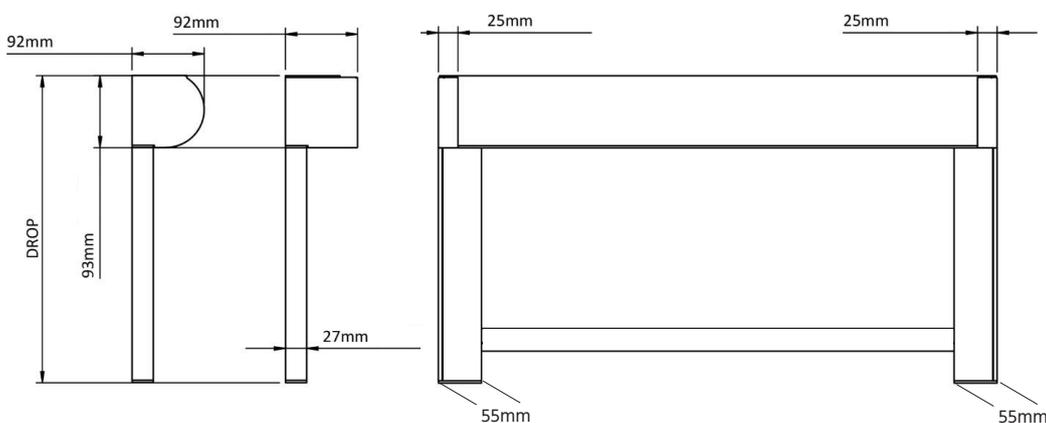

Ambience Blackout PLUS Side Guide

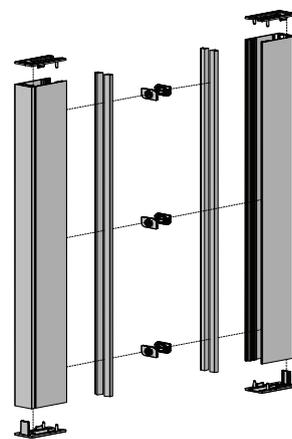

Headbox - Round | Square*

