

Basics Wand Drive Roller Blind

Product Information

Basics Wand Drive bridges the gap between Verosol's Ambience chain operated roller blinds and motorised roller blinds.

Verosol's Basics Wand Drive is a battery operated cost-effective solution that allows users to maintain convenience and child safety.


The battery drive has 1.1Nm torque, and is available with a 900mm white control wand that is magnetically attached to the drive unit. The wand is also transferable across blinds. The wand must remain connected to operate and charge the product, but as a benefit allows operation to be removed in applications that may demand it.

This is a retro-fittable solution that can be used with Verosol's single or twin chain operated Ambience roller blind systems. The Basics Wand Drive cannot be operated with the Automate Hub or APP Control home automation, and is not compatible with any remote controls.

The Basics Wand Drive is suitable for residential use.

Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit www.verosol.com.au

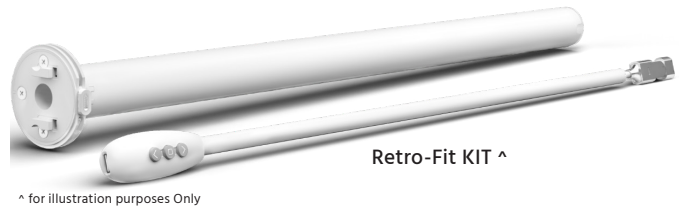

Technical Information

Product Code	R221.1		
Product Name	Basics Wand Drive - Battery Wand Operated Roller Blind		
Retro-Fit Option	Suitable for retrofitting into existing Single or Twin chain operated roller Ambience roller blinds without the need for change to deductions or making adjustments to sizes		
Operation	Battery WAND Operation		
Dimensions	Width	600mm minimum - upto 30000mm maximum*	
	Drop	500mm minimum - upto 3000mm maximum*	
		*Some restrictions apply to minimum & maximums - available sizes based on fabric weights	
	Maximum Area	*Maximum 6m ² is weight based - Maximum total Weight: 5kg	
Roller Tube	Light - 43mm	Standard - 44mm	Heavy Duty - 49mm
	Optimised for operation based on fabric weight and width of blind to reduce tube deflection		
Base Rail Options	D30 Silent [14mm x 31mm], Flat [11mm x 22mm], Round [22mm], Verosol [17mm x 28mm], Elliptical [11mm x 22mm]		
	Colours	Paint: White, Black, Sandstone, Anodised: Clear [Colour availability dependant on rail type]	
Control	Wand Drive Unit	Voltage: 5V DC Torque: 1.1Nm Max Run Time: 6 minutes Speed: 28 RPM (adjustable to 20 or 24) IP Rating: IP20 Temp Working Range: (0° C to 60° C) Insulation Class: III Limit Switch Type: Electronic Current: 0.80 A Battery Size/Type: 2600mAH Sound Level: 56dBA - testing under ISO3745 Power: 9.6W	
	Colours	White	
Brackets	Material	Press formed steel, pre-treated and powder coated	
	Colours	White	


Vier Lite Wand Roller Blind

Basics Wand Drive - Battery Operated Motor and Wand



Options	Wall Charger	5V USB WALL CHARGER PLUG 2A FOR 5V MOTORS
	USB-C Cable	AUTOMATE USB CABLE TYPE C 5V - 4000MM

System Diagram

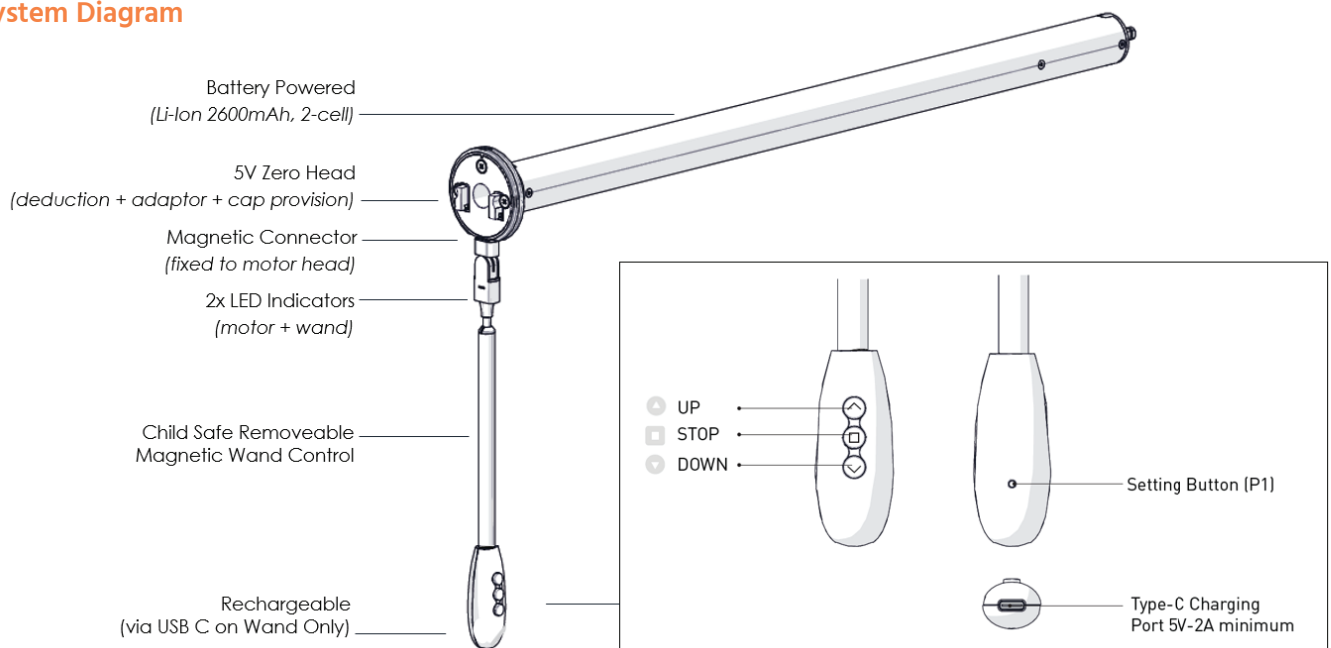

Features

- **SIMPLE, INTUITIVE OPERATION**
- **ZERO HEAD** - The slim motor head retains manual system deductions, eliminating the need for bracket adjustment
- **CHILD-SAFE MAGNETIC WAND** - Wand is magnetically held in place or detached to control multiple motors
- **EASY CHARGING** - Accessible USB C port on base of wand provides convenient charging access
- **MINIMAL USER EFFORT** - Compared to a chain drive system, operation is as simple as a press of a button